


P/N 7093

- 1-EXTEND JACK 4"-5"
- 2-UNPLUG BOOT AND CONNECTOR FROM OLD SWITCH
- 3-REMOVE TWO SCREWS HOLDING ON THE OLD SWITCH
- 4-REMOVE OLD SWITCH
- 5-MOUNT NEW SWITCH AND SWITCH CLIP USING THE NEW SCREWS PROVIDED
- 6-CUT OFF EXISTING HARNESS PLUG
- 7-CRIMP CONNECT NEW NEW 6" LEG SWITCH PIGTAIL #6500 TO COACH HARNESS AND HEAT SHRINK THE CONNECTORS  
(NOTE: WIRE COLORS NEED NOT MATCH)
- 8-GENTLY PULL THIS HARNESS UP BEHIND THE JACK MOUNTING PLATE, LEAVING SOME SLACK
- 9-USING SUPPLIED CABLE TIE, SECURE EXCESS HARNESS AT TOP OF MOUNTING PLATE
- 10-TEST OPERATION BY RETRACTING AND EXTENDING THE JACK WHILE CHECKING THAT THE LIGHT ON THE CONTROL PANEL TURNS OFF WHEN THE JACK IS RETRACTED AND ON WHEN THE JACK IS EXTENDED

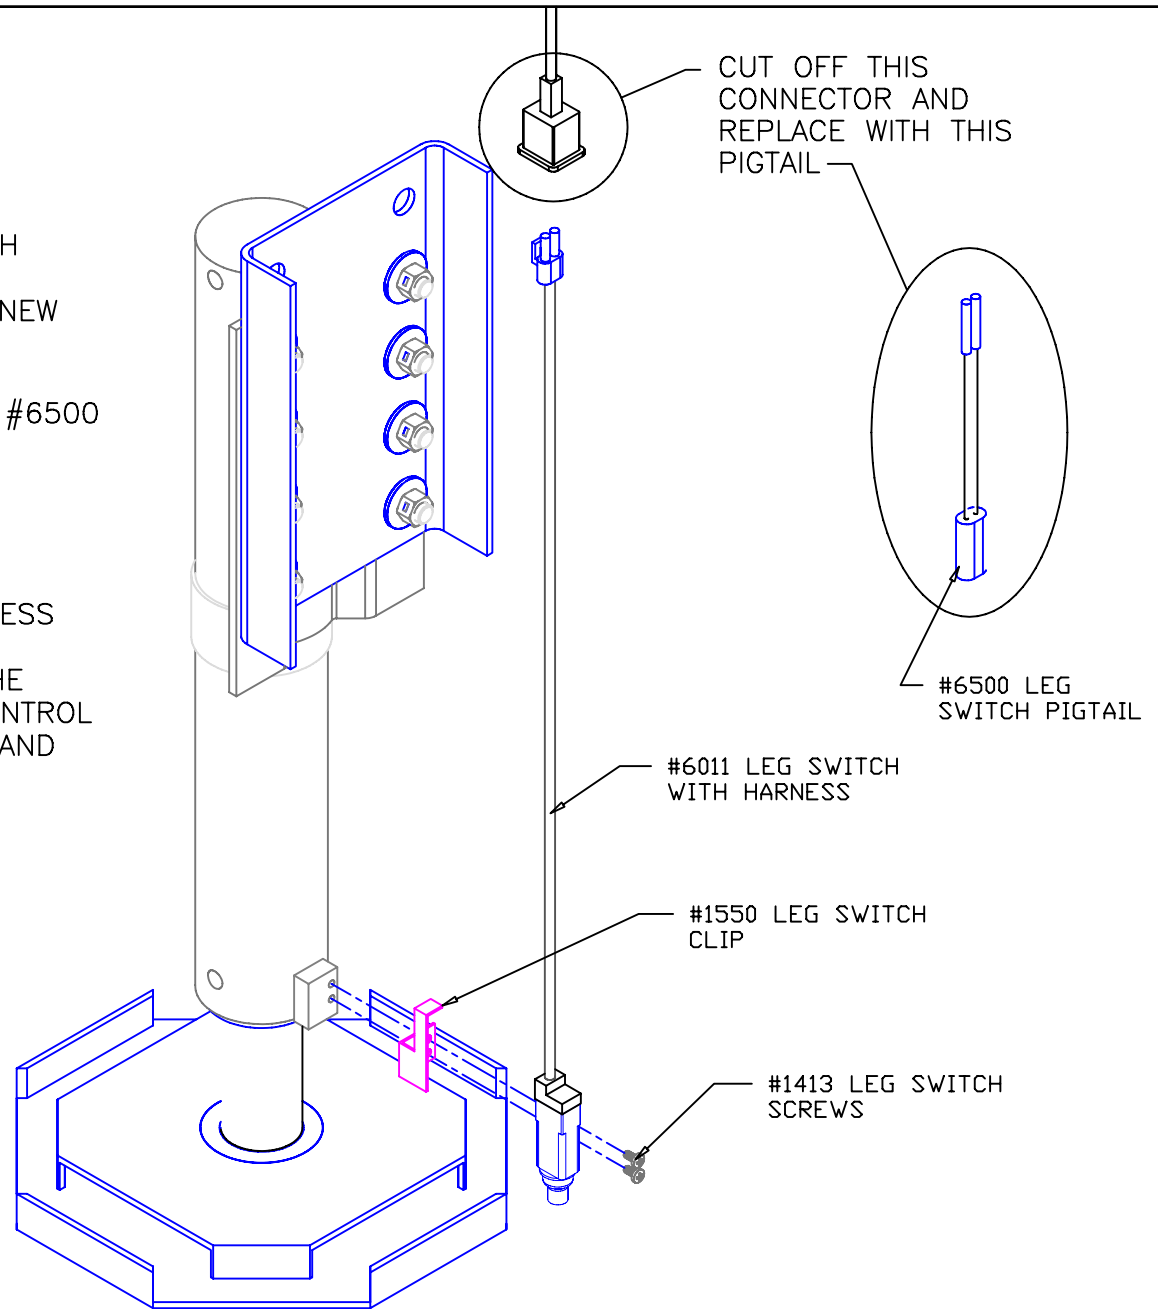

*Equalizer*

55169 COUNTY ROAD 3  
ELKHART, IN 46515

#	REVISIONS	BY:	DATE:

NOTICE - This drawing, including principles of design, is the property of Days Corporation, Elkhart, Indiana, with the agreement that it is not to be reproduced, copied, or loaned in any manner that may constitute a detriment directly or indirectly to Days Corporation. Acceptance of this will be construed as an agreement of the above.

Leg Switch Upgrade  
Installation